

# Horizontal Blind Installation Instructions

Attention: Carefully review all installation instructions and diagrams before beginning the installation process. Please make special note that the screws provided with your new blinds are made for mounting into wood surfaces and drywall on wood installation. If you are mounting to masonry surfaces, metal or hollow spaces please visit a hardware store to discuss the best options for your application.

Depending on how you have ordered your new blinds they have been produced to your specifications whether it is: ceiling, inside or outside mount. Suggested items needed to complete your installation are:

Pencil

Standard or .” Nut Screw Driver or Drill Bit

Hand Screw Driver or Electric Drill

Level

Measuring Tape

## Installation Steps:


- 1) Hold the headrail of the blind where you would like it to be mounted, ensuring the headrail is level, and there are no obstructions, use a pencil to make reference marks at each end of the headrail.
- 2) Each horizontal blind is provided with 1 pair of end brackets and center supports if required, and two screws per bracket. The orientation of the end brackets when being mounted should be with the doors of the bracket facing towards the inside of the room. Using the reference marks which you have already made hold each bracket up and mark each screw locations with a pencil, choosing diagonal screw locations is recommended. If you have been provided center support(s) ensure the top of the center support is level with top of the end brackets. Once screw locations have been marked and all bracket locations are level fasten and tighten all screws through brackets.
- 3) Open the doors of the end brackets and carefully slide the headrail of the blind into all brackets, Once the headrail is fully in all brackets lower end bracket doors ensuring they close completely snapping closed.
- 4) Lower the blind using the lift cord and test the operation to ensure no foreign obstructions are effecting the operation of the blind.
- 5) The valance has magnets attached to the back, simply place the valance on the headrail and align it to your liking.

## Warning


Young Children can STRANGLE themselves in the cord and bead chain loops. Please see steps below on what you can do to prevent this from happening:

- Always keep cords and bead chains out of children's reach.
- Move cribs, playpens and other furniture away from cords and bead chains.
- Children can climb furniture to get to the cords and bead chains.
- Attach tension device to wall or floor. This can prevent children from pulling cords and bead chains around their necks.

# Horizontal Blind Installation Schematic

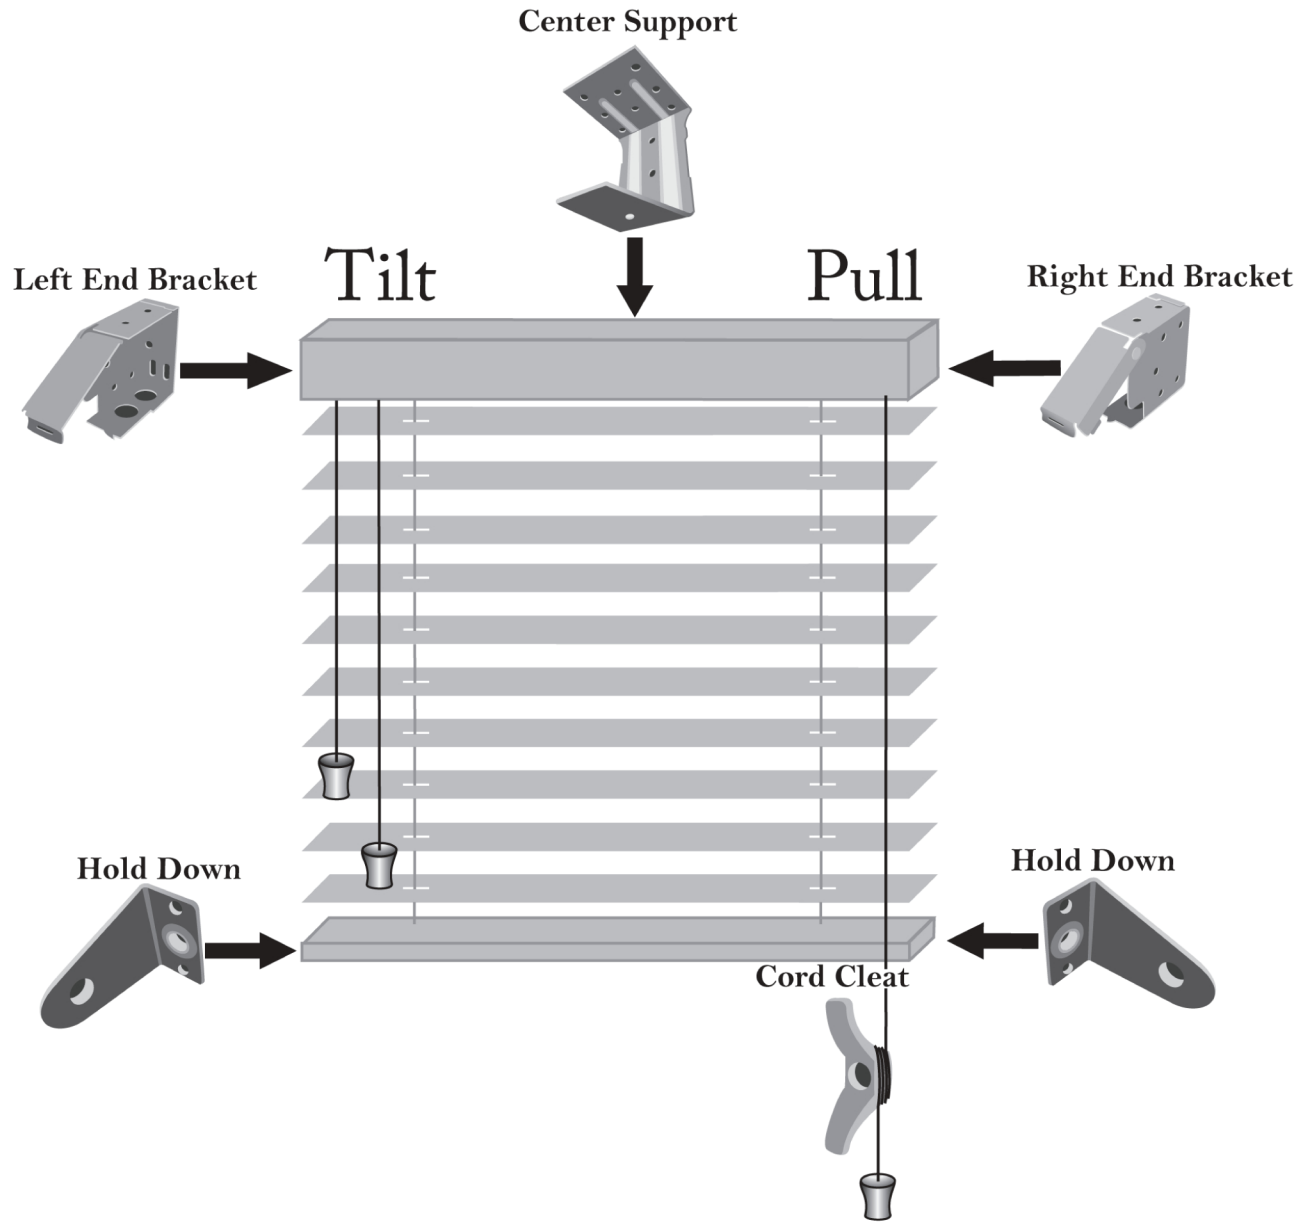

## Left or Right Bracket

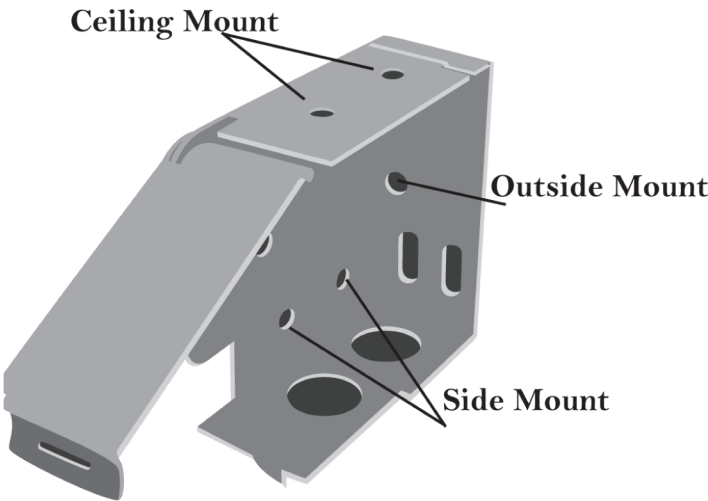

## Center Support

